

*Narragansett Imaging*

DATA SHEET

XQ2182 Series  
CAMERA TUBE

*Narragansett Imaging*  
51 Industrial Dive  
North Smithfield, RI 02876  
Tel: (401) 762-3800  
Fax: (401) 767-4407  
[www.nimaging.com](http://www.nimaging.com)

April 2001

25.4 mm (1 inch) diameter Plumbicon® television camera tube designed specifically for high-resolution fluoroscopy and digital imaging applications where both quantum noise and subtraction characteristics are required.

The XQ2182 series comprises the following versions:

- XQ2182/02X Rear loading, with target centering ring and BG18 anti-halation glass disk.
- XQ2182/03X Front loading, with metal ring and BG18 anti-halation glass disk.

Special features are:

- Ultra high-resolution photoconductive target optimized for P20 phosphor.
- Variable lag using rear light bias.
- Diode Gun for high beam reserve and increased resolution.
- BG18 anti-halation disc for improved contrast.

---

**QUICK REFERENCE DATA**

---

“Diode” electron gun

Diameter	25.4 mm (1 in)
Length	approx. 170 mm
Focusing	magnetic
Deflection	magnetic
Useful target area, circle diameter	16.2 mm
Spectral response	See Fig. 3
XQ2182/02X	typ. 465 $\mu$ A/lmF
XQ2182/03X	typ. 465 $\mu$ A/lmF
Resolution	typ. 60%
Heater	6.3 V, 190 mA

---

®Registered trade mark for television camera tube.

**OPTICAL DATA**

Dimensions of quality area on photoconductive target circle, dia 16.2 mm.

Orientation of image on target

For correct orientation of the image on the target the vertical scan should be essentially parallel to the plane passing through the tube axis and the mark on the tube base.

Faceplate

Thickness	1.2 mm
Refractive index	1.49

BG18 anti-halation glass disc (XQ2182/03X, XQ2182/02X)

Thickness	1.07 mm
Refractive index	1.54

**ACCESSORIES**

Socket type 56605

Deflection and focusing coil unit,

XQ2182/02X	AT1126/03S
XQ2182/03X	AT1116S

**ELECTRICAL DATA**

Deflection magnetic

Focusing magnetic

Heating

Indirect by a.c. or d.c.

Heater voltage	$V_f$	6.3 V $\pm$ 5%
----------------	-------	----------------

Heater current, at $V_f = 6.3$ V	$I_f$	190 mA
----------------------------------	-------	--------

The heater voltage must not exceed 9.5 V r.m.s. For optimum performance stabilization of the heater voltage is recommended.

**Capacitance**

Signal electrode to all

XQ2182/02X	2.5 to 4 pF
XQ2182/03X	3 to 5 pF

These capacitance's, which are effectively the output impedance's, increase when the tubes are inserted in the coil unit.

**LIMITING VALUES** (Absolute maximum rating system)

All voltages are referred to the cathode, unless otherwise stated.

Notes

Signal electrode voltage	$V_{as}$	max.	50 V	
Grid 4 voltage (mesh)	$V_{g4}$	max.	1100 V	
Grid 3 voltage	$V_{g3}$	max.	800 V	
Voltage between grid 4 and grid 3	$V_{g4/g3}$	max.	450 V	
Grid 2 voltage	$V_{g2}$	max.	350 V	
Grid 1 voltage, positive	$V_{g1}$	max.	20 V	1
Grid 1 voltage, negative	$-V_{g1}$	max.	200 V	
Grid 1 current ( $\approx$ cathode current)	$I_{g1}$	max.	10 mA	3
Cathode to heater voltage, positive peak	$V_{kfp}$	max.	50 V	
Cathode to heater voltage, negative peak	$-V_{kfp}$	max.	125 V	
Cathode heating time before drawing cathode current	$t_h$	min.	1min	
External resistance between cathode and heater at $V_{kfp} > 10$ V	$R_{kf}$	min.	2 k $\Omega$	
Ambient temperature, storage and operation	$T_{amb}$	max. min.	50 °C -30°C	
Faceplate temperature, storage and operation	$T$	max. min.	50 °C -30°C	4
Faceplate illuminance	$E$	max.	500 lx	5

# Camera Tube

# XQ2182 Series

## OPERATING CONDITIONS AND PERFORMANCE

Notes

### Conditions

6

Cathode voltage	$V_k$	0	V	
Signal electrode voltage	$V_{as}$	45	V	
Beam current	$I_b$			2,7,8
Grid 4 voltage	$V_{g4}$	960	V	9
Grid 3 voltage	$V_{g3}$	600	V	9
Grid 2 voltage	$V_{g2}$	300	V	
Grid 1 voltage	$V_{g1}$	0 to 20V		
Blanking voltage on grid 1, peak to peak	$V_{g1\ p-p}$	30	V	
Focusing coil current				6
Deflection and alignment currents				6
Faceplate illuminance (P20 light source)	E	0 to 10 lx		
Faceplate temperature	T	20 to 40°C		

### Electron Gun Characteristics

Grid 1 voltage for cut-off at $V_{g2} = 300V$	$V_{g1}$	-10 to 0V	
Grid 1 voltage for normal beam setting	$V_{g1w}$	$\leq 20$	V
Grid 1 current at normally required beam currents	$I_{g1}$	$\leq 5$	mA
Grid 2 current at normally required beam currents	$I_{g2}$	$\leq 0,1$	mA
Blanking voltage, peak to peak, with respect to $V_{g1w}$	$V_{g1\ p-p}$	30	V

### Performance

Dark current	$I_d <$	2 nA	
Sensitivity at colour temperature of 2856K			10
XQ2182/02X	min. 380	typ. 465 $\mu A/lm$	
XQ2182/03X	min. 380	typ. 465 $\mu A/lm$	
Sensitivity with P20 light source			
XQ2182/02X	min. 80	typ. 110 $\mu A/lmF$	
XQ2182/03X	min. 80	typ. 110 $\mu A/lmF$	
Peak signal current with E=1 lx (P20)			11
XQ2182/02X	$I_{sp}$ min. 175	typ. 215 nA	
XQ2182/03X	$I_{sp}$ min. 175	typ. 215 nA	
Peak to current (16.2 mm dia scanning)		2000 nA	7
Gamma of transfer characteristic		0.95 $\pm$ 0.05	
Spectral response:		see Fig. 3	


				Notes
Resolution				12
Modulation depth i.e. uncompensated amplitude response at 20.3 lp/mm (scanned area 9.6 x 12.8 mm) at the centre of the picture (5 Mhz, 400 TV lines)	min.	typ.		
	65%	75%		
Modulation depth at 12 lp/mm (scanned area 16.2mm diameter) at the centre of the picture (5MHz, 400 TV lines)	min.	typ.		
	80%	90%		
Modulation transfer characteristic	see Fig. 4			
Residual signal after dark pulse of 50 ms	min.	typ.	max.	13,14
	16%	20%	25%	
Residual signal after dark pulse of 200 ms		typ.	max.	
		4.5%	7%	

**Blemish Specification**

All tests on Plumbicon tubes are carried out in the manufacturer’s test channel under the following conditions:

1. *Light source:* P20 light distribution
2. *Filter:* Schott VG9, thickness 1 mm
3. *Test transparency,* back-illuminated, projected onto the target by means of a high quality lens, producing an even illumination on the specified scanned area.

A circular test transparency is used for the evaluation of tubes. The area of the chart is divided into three quality zones by two concentric circles.

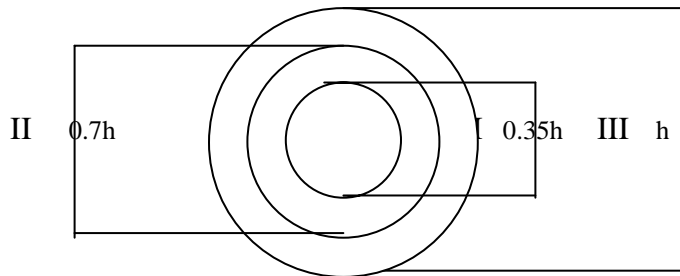

4. *The video amplifier frequency response* is essentially flat up to 5 MHz, with a sharp fall-off to 6 MHz.
5. *No gamma correction or aperture corrections* are applied in the video amplifier.
6. *The light level* on the Plumbicon tube is adjusted to produce a peak signal current  $I_s$  in accordance with Table 1.
7. *The electrical setting* of the tube is in accordance with the published data and the “Instructions for use”.
8. *The beam current* of the Plumbicon tube is adjusted to just stabilize a peak current of magnitude  $I_b$  in accordance with Table 1.
9. *Monitor.* The obtained picture is observed on the monitor producing a non-blooming white.

**Table 1:  $I_s$  and  $I_b$  settings**

Scanned area*	15 or 16.2 mm dia.
$I_s$	0.1 uA
$I_b$	0.2 uA

\* Scanning amplitude controls adjusted such that the circular quality area of the target is displayed on a standard monitor as a circular area with a diameter equal to the raster height.

Number, size, and location of blemishes allowed.

Note 1

Dimensions of blemishes in % of picture height	Permitted number of blemishes		
	Zone 1	Zone 2	Zone 3
>0.7%	0	0	0
<0.7% but >0.45%	0	0	0
<0.45% but >0.2%	3 any Zone		
<0.2% Note 2			
Total permitted number of blemishes	3 Max		

**Notes**

1. Blemishes with contrast <6% (if black) and <3% (if white) are neglected.
2. Blemishes of the size are not counted unless their concentration causes a smudged appearance. Such concentrations are evaluated as blemishes and as contrast, the average contrast of the concentration is taken.

**NOTES**

1. The “Diode” gun operates with a positive grid 1 voltage, hence draws some grid current. The grid 1 voltage (d.c.) must be adjusted for correct beam current as described in note 8.
2. “Diode” gun is a triode gun operating in a diode mode, providing a very high beam reserve.  
  
Continuous operation with a high beam setting is to be avoided since this will shorten tube life. High  $I_b$  settings should be used under high light intensity conditions only. All other modes of operation should be normal  $I_b$  settings or have then cut off.
3. A current limiter must be incorporated to limit total cathode current to 10 mA maximum.
4. The tube can withstand short excursions up to 70 °C without any damage or irreversible degradation in performance.
5. For short intervals. During storage the tube face shall be covered with the plastic hood provided; when the camera is idle the lens shall be capped, in stand-by also the beam will be cut-off.
6. The operating conditions and performance data quoted relate to operation of the tube in coil units AT1116 or AT1126. See relevant data of deflection/focusing assemblies.  
Scanning amplitude should be adjusted such that the useful target area of 16.2-mm dia. is displayed on a standard monitor as a circular area with a diameter equal to the raster height.
7. The maximum peak signal which can be handled is 3  $\mu$ A. Video amplifiers should be designed to accommodate this.
8. The beam current  $I_b$  as obtained by adjusting the control grid voltage (grid 1) is set at 400 nA.  $I_b$  is not the total current available in the scanning beam, but is defined, as the maximum amount of signal current  $I_s$ , that can be obtained with this beam.  
In the performance figures, e.g. for resolution and lag, the signal current and beam current conditions are given, e.g. as  $I_s/I_b = 20/300$  nA. This means: with a signal current of 20 nA and a beam setting which just allows a signal current of 300 nA.  
  
N.B. The signal currents are measured with an integrating instrument connected in the signal electrode lead and a uniform illumination of the scanned area. See note 11.
9. The optimum voltage ratio  $V_{g4}/V_{g3}$  to minimize beam-landing error (preferable  $\leq 1$  V) depends on the type of coil unit used. For types AT1116 and AT1126 a ratio of 1.6 is recommended. Grid 4 (mesh) should under no circumstances be allowed to operate at a voltage below that of grid 3 as that might damage the target.
10. Measuring conditions: illuminance level 4.54 lx at a colour temperature of 2856K and filters. Schott VG9 and Calflex B1/K1 inserted in the light path.

**Notes (continued)**

11. The peak signal currents are measured on a waveform oscilloscope and with a uniform illumination on the 16.2-mm  $\phi$  target area.

When measured with an integrating instrument connected in the signal-electrode lead the average signal currents will be smaller:

- a) By a factor  $\alpha$  ( $\alpha = \frac{100-\beta}{100}$ ),  $\beta$  being the total blanking time in %; for the CCIR system  $\alpha$  amounts to 0.75; for the NTSC system  $\alpha$  amounts to 0.83.
- b) By a factor  $\delta$ ,  $\delta$  being the ratio of the active target area (circle with: 16.2 mm  $\phi$ ) to the area which would correspond with the adjusted scanning amplitude (16.2 mm x 21.6 mm) this ratio amounts to  $\delta = 0.59$ .  
The total ratio of integrated signal current,  $I_s$ , to the peak signal current,  $I_{sp}$ , amount to  $\alpha \times \delta = 0.44$  for the CCIR system and 0.49 for NTSC system.

12. As measured with a 50 mm Leitz Summicron lens having a sine response of approximately 85 % at 400 TV lines at f: 5.6. The published 75% typ. is uncorrected. Tube resolution is higher. Measured with 200 nA signal current and a beam current just sufficient to stabilize a signal current of 400 nA. The horizontal amplitude response can be raised by means of suitable correction circuits, which affect neither the vertical resolution nor the limiting resolution.

13. Measured with a 20 nA signal current and a beam current just sufficient to stabilize a signal current of 30 nA.

14. Decay lag. After a minimum of 5 s of illumination of the target. Values shown relating to decay lag represent the residual signal currents in percentages of the original signal current as a function of time, after the illumination has been removed.

**Diagrams**

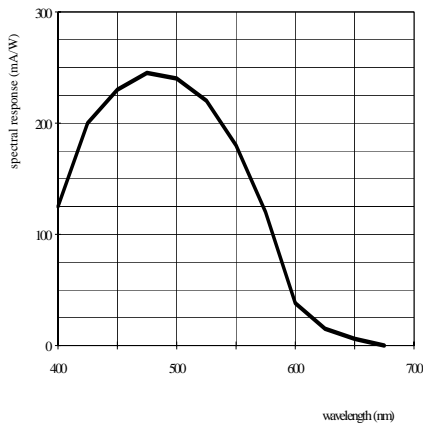


Fig. 3 Typical spectral response curve.


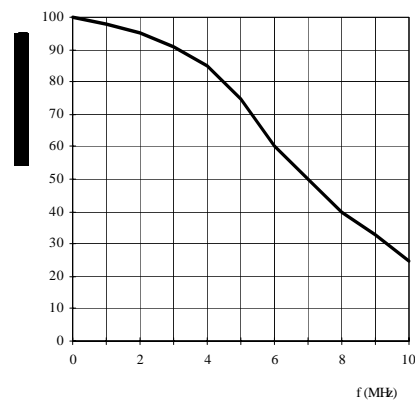


Fig. 4 Typical square-wave response curve.


**Mechanical Data**

**Rear loading tubes XQ2182/02X**

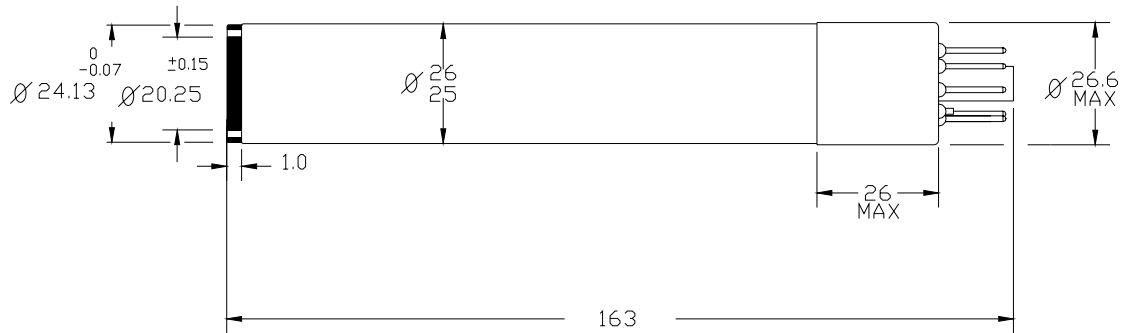

**Figure 1**

**Front loading tubes XQ2182/03X**

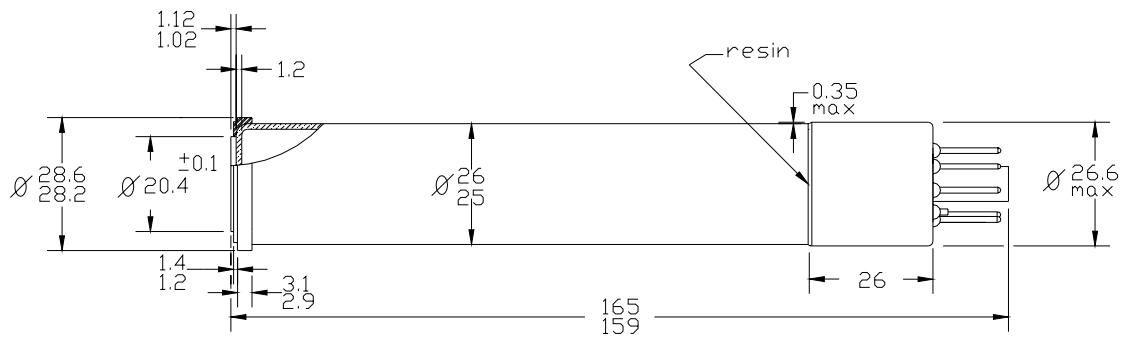




**Figure 2**

Mounting position: any


Mass:  $\approx 70\text{g}$

Base: IEC 67-I-33a (JEDEC E8-11)

**Mechanical Data**

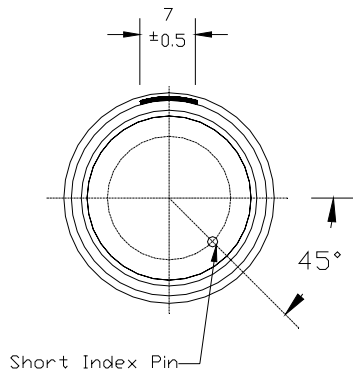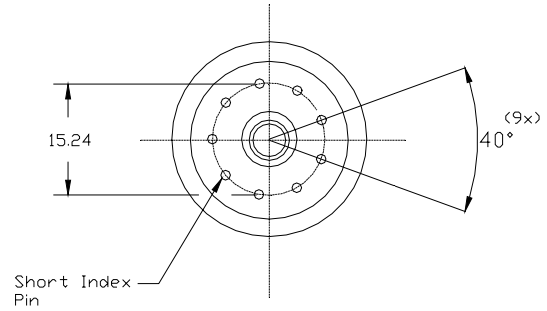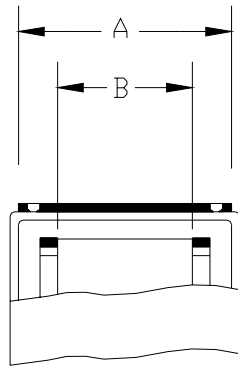


**FRONT VIEW  
XQ2182/02X  
Figure 2a**

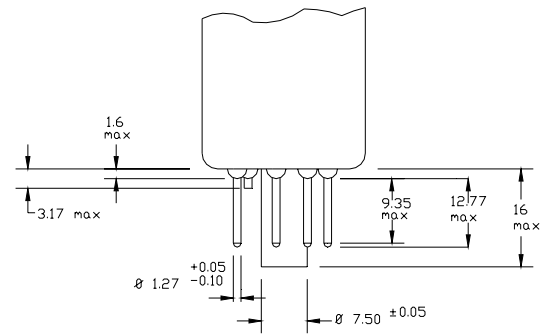

**Figure 2b**

(1) The distance between the geometrical centers of diameter A of the reference ring and diameter B of the mesh electrode ring is < 100 µm.

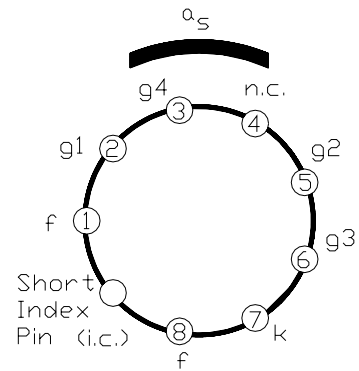

**Figure 2c**

**For more information contact:**

*Narragansett Imaging*

Don Browne

Vice President, Camera Tubes

51 Industrial Drive

North Smithfield, RI 02896-2078

Tel: (401) 762-3800

Fax: (401) 767-4407

[www.nimaging.com](http://www.nimaging.com)